#### **MANUAL POSITIONERS**

Steel Extended Contact Bearing Stages

Stainless Steel Extended Contact Bearing Stages

Aluminum Stages

**Rotation Stages** 

Goniometers

Rack & Pinion Dovetail Stages

Preset Dovetail Stages

Leadscrew Slides

#### Tilt Platforms

OEM Slides

Accessories

Tilt platforms may be used as mirror mounts or prism tables. They can be mounted vertically or horizontally as required.

## **Tilt Platforms**


- Two or three axes of tilt
- · For alignment of prisms or mirrors
- Compatible with 65, 40 and 25mm stages
- Thumb-screw adjusters
- Inch and metric mounting holes




Tilt platforms with 2 or 3 degrees of freedom are useful for the alignment of all kinds of optical components. These tilt platforms may be combined with stages either horizontally or vertically to provide an easy method of angular control. Three sizes are offered: 65mm, 40mm and 25mm. The base is bolted onto the stage or bracket and the top plate is adjusted by means of the thumb-screws protruding from the edge of the platform. The third axis, when present, is adjusted by means of a knob. A useful clamp for holding prisms is offered as an option for use with the 65 and 40mm platforms.

ORDERING
&
TECHNICAL SUPPORT
(949) 851-5881
FAX (949) 851-5058
E-MAIL
sales@optosigma.com
WEB
www.optosigma.com



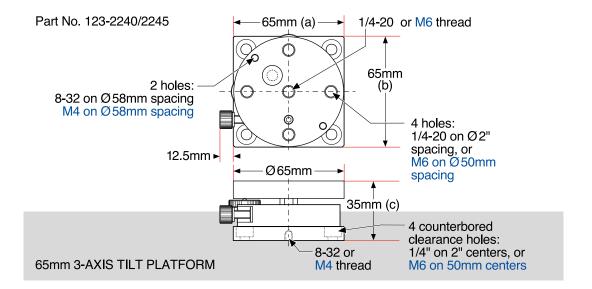

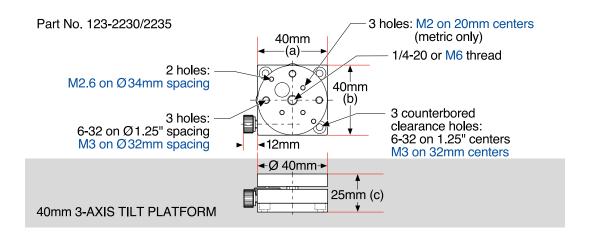

Steel Extended Contact Bearing Stages

Steel Extended Contact Bearing Stages

Aluminum Stages

Rotation Stages

Goniometers

Rack & Pinion Dovetail Stages


Preset Dovetail Stages


Leadscrew Slides

#### Tile Dineform

**OEM Slides** 

Accessories

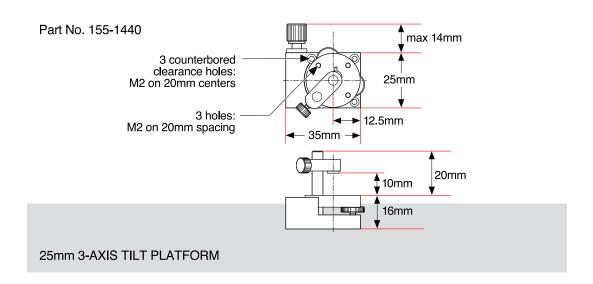

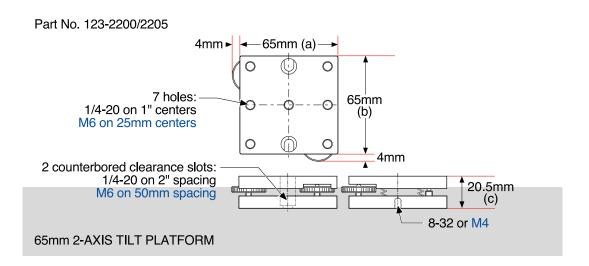

ORDERING
&
TECHNICAL SUPPORT
(949) 851-5881
FAX (949) 851-5058
E-MAIL
sales@optosigma.com
WEB
www.optosigma.com



### **MANUAL POSITIONERS**

Steel Extended Contact Bearing Stages

Stainless Steel Extended Contact Bearing Stages

Aluminum Stages

Rotation Stages

Goniometers

Rack & Pinion Dovetail Stages


Preset Dovetail Stages


Leadscrew Slides

### Tilt Platforms

OEM Slides

Accessories

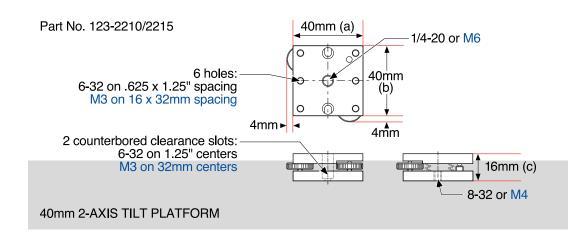

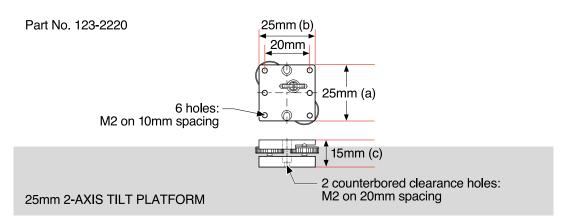

# **Specifications & Tolerances**

Dimensions:  $\pm 0.2$ mm Adjustment: Sensitivity: 10arcmin 2-axis:  $\pm 2^{\circ}$  Material: Aluminum 3-axis:  $\pm 3^{\circ}$ 

Finish: Black anodized

S

THE FIGURE 1			INCH	METRIC		
Dimensions, a x b (mm)	Height, c (mm)	Axes	Load Capacity (kg)	Price	PART NUMBER	PART NUMBER
		_	1		1	
65 x 65	20.5	2	4.0		123-2200	123-2205
40 x 40	16.0	2	2.0		123-2210	123-2215
25 x 25	15.0	2	1.5		-	123-2220
65 x 65	35.0	3	0.3		123-2240	123-2245
40 x 40	25.0	3	0.2		123-2230	123-2235
25 x 25	15.0	3	0.1		-	155-1440
	Dimensions, a x b (mm) 65 x 65 40 x 40 25 x 25 65 x 65 40 x 40	Dimensions, a x b (mm)  65 x 65 20.5 40 x 40 16.0 25 x 25 15.0  65 x 65 35.0 40 x 40 25.0	Dimensions, a x b (mm)         Height, c (mm)         Axes           65 x 65 (40 x 40)         20.5 (2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2	a x b (mm)         Height, c (mm)         Axes         Capacity (kg)           65 x 65 (kg)         20.5 (kg)         2 (kg)           40 x 40 (kg)         16.0 (kg)         2 (kg)           25 x 25 (kg)         15.0 (kg)         2 (kg)           65 x 65 (kg)         35.0 (kg)         3 (kg)           40 x 40 (kg)         2 (kg)         3 (kg)           40 x 40 (kg)         3 (kg)         0.3 (kg)           40 x 40 (kg)         3 (kg)         0.2 (kg)	Dimensions, a x b (mm)         Height, c (mm)         Axes         Load Capacity (kg)         Price           65 x 65   20.5   40 x 40   16.0   2   2.0   25 x 25   15.0   2   1.5         2   1.5   4.0	Dimensions, a x b (mm)         Height, c (mm)         Axes         Load Capacity (kg)         Price         PART NUMBER           65 x 65

# **Prism Holding Clamps**

For Use with 3-axis Tilt Platform Size: (mm)	To Hold Prisms of Max Side, S (mm)	Price	PART NUMBER
65	32		113-0157
40	26		113-0147
25	10		155-1441

ORDERING & TECHNICAL SUPPORT

(949) 851-5881 FAX (949) 851-5058

E-MAIL

sales@optosigma.com

WEB

www.optosigma.com

